

jc406 U.S. PTO
08/17/00

TRANSMITTAL FORM



08/17/2000

Version: 1.0.0

Application Type: Utility Patent Filing

jc406 U.S. PTO
09/617935
08/17/00

ICEMAKER ASSEMBLY

Application No.: 09/617,935

Attorney Docket No.: RD26643USA

First Named Inventor: Andrew Philip Shapiro

I certify that the use of this system is for OFFICIAL correspondence between patent applicants or their representatives and the USPTO. Fraudulent or other use besides the filing of official correspondence by authorized parties is strictly prohibited, and subject to a fine and/or imprisonment under applicable law.

I, the undersigned, certify that I have viewed a display of document(s) being electronically submitted to the United States Patent and Trademark Office, using either the USPTO provided style sheet or software, and that this is the document(s) I intend for initiation or further prosecution of a patent application noted in the submission. This document(s) will become part of the official electronic record at the USPTO.

Email Address: patnode@crd.ge.com

Attached declaration: DEC.tif

Attached fee-transmittal: PatnodeRD26643USAffee.xml

Attached specification: 26643USA.xml

SUBMITTED BY

Attorney or Agent Name: Patrick Kennedy Patnode

Electronic Signature Mark: PKP

Date Signed: 20000817

Registration Number: 40121

09/617935, 08/17/00

FEE TRANSMITTAL

Electronic Version: 1.0.1

Patent fees are subject to annual revisions on or about October 1st of each year. Small entity payments must be supported by a small entity statement, otherwise large entity fees must be paid. See 37 C.F.R. Sections 1.27 and 1.28.

Filing As Large Entity

Total payment: \$ 2064.00

The commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number: **07-0868**

Deposit Account Name: **General Electric Company CRD**

Charge Any Additional Fee Required Under 37 C.F.R. Sections 1.16 and 1.17.

BASIC FILING FEE

Fee Description	Fee Paid
Utility Filing Fee	\$ 690

Subtotal For Basic Filing Fee: **\$ 690.00**

EXTRA CLAIM FEES

				Extra Claims	Fee	Fee Paid
Total Claims	92	-	20	=	72 x \$ 18 =	\$ 1296.00
Independent Claims	4	-	3	=	1 x \$ 78 =	\$ 78.00

Subtotal For Extra Claims Fees: **\$ 1374.00**

SUBMITTED BY

Attorney or Agent Name: **Patrick Kennedy Patnode**

Registration Number: **40121**

Electronic Signature Mark: **PKP**

Date Signed: **20000817**

SPECIFICATION

[Electronic Version 1.1]

ICEMAKER ASSEMBLY

Abstract of Disclosure

An icemaker assembly is disposed within a refrigerator having a freezer compartment, a fresh food compartment and respective freezer and fresh food door assemblies. The icemaker assembly comprises a conveyor assembly positioned within the freezer compartment having a flexible conveyor belt with a multiplicity of individual ice cube molds for creation of individual ice cubes. An ice cube storage bin is positioned below the conveyor assembly for storing the ice cubes and a fullness sensor is positioned for determining the fill level of ice cubes within the ice cube storage bin.

ICEMAKER ASSEMBLY

Cross Reference to Related Applications

Continuity Statement This application claims priority of Provisional Applications entitled "Icemaker Assembly," by Tiemann, Voorhees & Shapiro, Serial No. 60/158,629; Serial No. 60/158,630; Serial No. 60/158,631; Serial No. 60/158,633; Serial No. 60/158,634; and Serial No. 60/158,636, each filed October 8th, 1999, which Provisional Applications are herein incorporated by reference.

Background of Invention

- [0001] This invention relates generally to an automatic icemaker, and more specifically to an improved icemaker having a conveyor assembly.
- [0002] A conventional automatic icemaker in a typical residential refrigerator has three major subsystems: an icemaker, a bucket with an auger and ice crusher, and a dispenser insert in the freezer door that allows the ice to be delivered to a cup without opening the door.
- [0003] The icemaker is usually a metal mold that makes between six to ten ice cubes at a time. The mold is filled with water at one end and the water evenly fills the ice cube sections through weirs (shallow parts of the dividers between each cube section) that connect the sections. Opening a valve on the water supply line for a predetermined period of time usually controls the amount of water. The temperature in the freezer compartment is usually between about -10F to about +10F. The mold is cooled by conduction with the freezer air, and the rate of cooling is enhanced by convection of the freezer air, especially when the evaporator fan is operating. A temperature-sensing device in thermal contact with the ice cube mold generates temperature signals and a controller, monitoring the temperature signals indicates when the ice is ready to be removed from the mold. When the ice cubes are ready, a motor in the icemaker drives a rake in an angular motion. The rake pushes against the cubes to force them out of the mold. A heater on the bottom of the mold is turned on to melt the interface between the

[0004] After the ice is harvested, a feeler arm, usually driven by the same motor as the rake, is raised from and lowered into the storage bucket. If the arm cannot reach its predetermined low travel set point, it is assumed that the ice bucket is full and the icemaker will not harvest until more ice has been removed from the bucket. If the feeler arm returns to its low travel set point, the ice making cycle repeats.

[0005] The ice storage bucket holds and transports ice to the dispenser in either crushed or whole cube form. If a user requests ice at the dispenser a motor drives an auger that pushes the ice to the front of the bucket where a crusher is located. The position of a door, controlled by a solenoid, determines whether or not the cubes will go through the crusher or by-pass it and be delivered as whole cubes. The crusher has sets of stationary and rotating blades that break the cubes as the blades pass each other. The crushed or whole cubes then drop into the dispenser chute.

[0006] The dispenser chute connects the interior of the freezer with the dispenser and usually has a door, activated by a solenoid, that opens when the user requests ice. The dispenser has switches that permit the user to select crushed or whole cubes, or water to be delivered to the glass. The dispenser may have a switch that senses the presence of a glass and starts the auger motor and opens the chute door.

[0007] Occasionally, the ice cubes that are stored in the storage bucket fuse together in large clusters of cubes. These fused clusters are much more difficult for the crusher to break up, raising the crushing design requirements for the mechanism and occasionally causing damage. Additionally, the designs of most conventional icemaker systems use substantial portions of the freezer volume, typically 25%-30%.

- [0017] FIG. 8 is a part schematic view of another aspect of the instant invention;
- [0018] FIG. 9 is a part schematic view of another aspect of the instant invention;
- [0019] FIG. 10 is a part schematic view of another aspect of the instant invention;
- [0020] FIG. 11 is a part schematic view of another aspect of the instant invention;
- [0021] FIG. 12 is a part schematic view of another aspect of the instant invention; and
- [0022] FIG. 13 is a part schematic view of another aspect of the instant invention.

Detailed Description

- [0023] FIG. 1 is a front perspective view of a side-by-side refrigerator 10 including a freezer compartment 12 and a fresh food compartment 14. Freezer compartment 12 and fresh food compartment 14 are arranged side-by-side. A side-by-side refrigerator such as refrigerator 10 is commercially available from General Electric Company, Appliance Park, Louisville, KY 40225.
- [0024] Refrigerator 10 includes an outer case 16 and inner liners 18 and 20. The space between case 16 and liners 18 and 20, and between liners 18 and 20, is typically filled with foamed-in-place insulation. Outer case 16 normally is formed by folding a sheet of a suitable material, such as pre-painted steel, into an inverted U-shape to form the top and side walls of case 16. The bottom wall of case 16 normally is formed separately and attached to the sidewalls and to a bottom frame that provides support for refrigerator 10. Inner liners 18 and 20 are typically molded from a suitable plastic material to form freezer compartment 12 and fresh food compartment 14, respectively. Alternatively, liners 18 and 20 may be formed by bending and welding a sheet of a suitable metal, such as steel. The illustrative embodiment includes two separate liners 18 and 20 as it is a relatively large capacity unit and separate liners add strength and are easier to maintain

within manufacturing tolerances. In smaller refrigerators, a single liner is formed and a mullion spans between opposite sides of the liner to divide it into freezer compartment 12 and fresh food compartment 14.

[0025] A breaker strip 22 extends between the case front flange and the outer front edges of liners 18 and 20. Breaker strip 22 is formed from a suitable resilient material, such as an extruded acrylo-butadiene-styrene based material (commonly referred to as ABS).

[0026] The insulation in the space between liners 18 and 20 is covered by another strip of resilient material 24, which is commonly referred to as the mullion. Mullion 24 is preferably formed of an extruded ABS material. It will be understood that in a refrigerator with a separate mullion dividing a unitary liner into a freezer and fresh food compartment, the front face member of that mullion corresponds to mullion 24. Breaker strip 22 and mullion 24 form a front face, and extend completely around the inner peripheral edges of case 16 and vertically between liners 18 and 20. Mullion 24, insulation between compartments 12 and 14, and the spaced wall of liners 18 and 20 separating compartments 12 and 14, sometimes are collectively referred to as the center mullion wall.

[0027] Shelves 26 and drawers 28 normally are provided in fresh food compartment 14 to support items being stored therein. Similarly, shelves 30 and wire baskets 32 or the like are provided in freezer compartment 12.

[0028] A freezer door 36 and a fresh food door 38 close the access openings to freezer and fresh food compartments 12 and 14, respectively. Each door 36, 38 is mounted by a top hinge 40 and a bottom hinge (not shown) to rotate about its outer vertical edge between an open position, as shown in Figure 1, and a closed position closing the associated storage compartment. Freezer door 36 typically includes a plurality of storage shelves 42 and fresh food door 38 typically includes a plurality of storage shelves 44 and a butter storage bin 46.

[0029] In accordance with one embodiment of the instant invention, an icemaker assembly 100 is disposed within freezer compartment 12, as shown in FIG. 2.

[0030] Icemaker assembly 100 includes a conveyor assembly 102, a first motor 104 drivingly coupled to conveyor assembly 102, a second motor 106 drivingly coupled to an ice crusher 108 and an auger mechanism 109, a refill valve 110 positioned adjacent to conveyor assembly 102, a first ice cube storage bin 112, an optional second ice cube storage bin 114, and a controller 116 electrically coupled to first motor 104 and second motor 106.

[0031] Conveyor assembly 102 is positioned within freezer compartment 12, typically within a top portion 118 of freezer compartment 12, defined by freezer liner 18, freezer door 36 and a baffle 117. Conveyor assembly 102 comprises at least a front roller 120 and a rear roller 122 and a continuous flexible conveyor belt 124 fitted in tension about front and rear rollers 120, 122. In one embodiment, flexible conveyer belt 124 is made of a flexible polymer. In illustrative examples flexible conveyer belt 124 is made from a thermoplastic elastomer, butyl rubber, chlorobutyl rubber, natural rubber, synthetic rubber, neoprene rubber, polyurethane, ethylene-propylene-diene modified, ethylene-propylene rubber, silicone rubber or the like. Silicone rubber is particularly preferred.

[0032] A multiplicity of individual ice cube molds 126 are disposed within or upon conveyor belt 124 for creation of individual ice cubes 128 therein. Typically, ice cube molds 126 are molded directly into the material of flexible conveyor belt 124. In an alternative embodiment, ice cube molds 126 are made of a rigid material and are fixedly attached to conveyor belt 124. The rigid material can be, for example, polypropylene, polyethylene, nylon, ABS, or the like.

[0033] Flexible conveyor belt 124 dimensions can vary depending upon the size of freezer compartment 12 and the desired ice cube 128 output for a respective freezer icemaker assembly 100. Typically, a nominal linear length (l) of flexible conveyor belt 124 is in the range between about 12 inches to about 18 inches, a nominal width (w) is in the range between about 3 inches to about 8 inches and a nominal depth (d) is in the range between about 0.5 inches to about 1.5 inches, as shown in FIG. 3.

[0034] As discussed above, the number of separate ice cube molds 126 is dependent upon the desired icemaking capacity, but a nominal number of individual ice cube molds 126 is in the range between about 20 to about 300 divided into a nominal number of rows (r) in the range between about 10 to about 30 and a nominal number of columns (c) in the range between about 2 to about 10. The dimensions of an individual ice cube mold 126 can vary depending on the size of ice cubes 128 desired but a nominal length (x) is in the range between about 0.75 inches to about 2 inches, and a nominal width (y) is in the range between about 0.5 inches to about 1.5 inches. Also, a variety of cube shapes can be used, including any conventional shapes as well as ornamental shapes such as fish, penguins, scallops, hemispheres, or the like.

[0035] First motor 104 (FIG. 2) is drivingly coupled to conveyor assembly 102. When energized, first motor 104 drives rear roller 122 (or alternatively front roller 120) causing conveyor belt 124 to rotate rear-to-front. A portion of ice cube molds 126 face generally upward during ice cube 128 formation. As conveyor belt 124 rotates forward over front roller 120, a portion of ice cube molds 126 face generally downward and ice cubes 128 frozen within are gravity fed into first ice cube storage bin 112. In one embodiment, first ice cube storage bin 112 is disposed within freezer door 36. First ice cube storage bin 112 can be molded directly into freezer door assembly 36 or first ice cube storage bin 112 can be fixedly attached to or removeably disposed within a portion of freezer door assembly 36. A harvester bar 129 is positioned adjacent to front roller

120 so as to contact a portion of each respective ice cube 128 (as ice cube molds 126 rotate forward over front roller 120) and assist ice cubes 128 to eject from ice cube molds 126.

[0036] As shown best in Fig. 2, the position of front roller 120 is aligned with a top portion 130 of first ice cube storage bin 112 (when freezer door 36 is in a closed position) such that ice cubes 128 frozen within conveyor belt 124 are gravity fed into first ice cube storage bin 112 as conveyor belt 124 rotates forward over front roller 120.

[0037] Refill valve 110 is positioned within freezer compartment 12 generally positioned above at least one and typically a row 132 of ice cube molds 126. Refill valve 110 is actuated when a belt position sensor 133 (optical, mechanical, proximity switch or the like) generates a signal to controller 116 indicating that belt 124 is in the correct position for refill. In one embodiment, belt position sensor 133 detects holes that are punched through a band that extends from the bottom web of conveyor belt 124 past a sidewall of a respective ice cube mold 126. An IR LED positioned adjacent, typically above, the band emits light that reaches a photodiode positioned below the band only when a hole passes between the two optical devices. An electronic circuit determines whether the hole is present by processing the signal from the photodiode. If the hole is between the LED and the photodiode, the circuitry stops first motor 104 and commences a water dose.

[0038] Typically, refill valve 110 is positioned within a machine or mechanical compartment (not shown). An outlet tubing 134 from refill valve 110 enters freezer compartment 12 from a rear wall of the liner 18. A fill tube 136 connected to outlet tube 134 delivers water to a respective row 132 of ice cube molds 126 at a portion of belt 124, typically adjacent to rear roller 122.

- [0042] Second ice cube storage bin 114 is typically removably disposed within freezer door 36. Second ice cube storage bin 114 is typically an optional supplemental storage bin as first ice cube storage bin 112 is the primary ice storage bin. Second ice cube storage bin 114 is typically disposed in a lower portion 140 of freezer door 36, below first ice cube storage bin 112 and below ice crusher 108.
- [0043] Second ice cube storage bin 114 is typically removable and as such, when removed, its space within door 36 can be used for storing other items. To prevent the ice maker assembly 100 from sending ice cubes 128 to second ice cube storage bin 114 when second ice cube storage bin 114 is not in place, a detection sensor 147 is used. In one embodiment, detection sensor 147 is a microswitch that is actuated by a special geometrical feature of second ice cube storage bin 114, such as a pin or a tab. Alternatively, detection sensor 147 could be an inductive proximity sensor that detects a metal insert on second ice cube storage bin 114, or an optical sensor that detects a reflecting surface adhered to second ice cube storage bin 114, or the like.
- [0044] First motor 104 is energized when the fullness of ice cubes 128 in first ice cube storage bin 112 falls below a preset fill level and an ice-ready sensor 142 generates a signal to controller 116 that a respective row 132 of ice cubes 128 to be delivered is frozen. If a first fullness sensor 144 disposed within or about first ice cube storage bin 112 generates a signal to controller 116 that the level of ice cubes 128 within first ice cube storage bin 112 has dropped below a preset fill level, a cycle is initiated and first motor 104 advances conveyor belt 124 one full row 132 of ice cube molds 126 and refill valve 110 delivers water to a row of empty molds 126.

[0045] In one embodiment, ice-ready sensor 142 is a temperature sensor such as a thermistor or a thermocouple in sliding contact with belt 124 adjacent front roller 120 where ice cubes 128 are delivered. Depending on the design of belt 124 and the airflow of refrigerator 10 various algorithms can be used to determine ice readiness from a temperature sensor. Time and temperature can be integrated to provide a degree-minute set point beyond which it is known that the ice is frozen. Alternatively a temperature cutoff can be used below which it is known that the ice is frozen. This temperature cutoff will typically be about 15°F.

[0046] Another ice-ready sensor 142 is based on capacitance. The capacitance sensor is positioned below belt 124 near front roller 120. The sensor is part of a capacitance bridge circuit. An excitation frequency is applied to the bridge. The bridge is balanced such that when a respective ice cube mold 126 is empty the voltage across the bridge is nearly zero. When water is in a respective ice cube mold 126, the capacitance reading of ice-ready sensor 142 increases dramatically, because the dielectric constant of water is about 80 times that of air, causing the bridge to become unbalanced. Thus the voltage signal sensed by controller 116 increases dramatically when water is in a respective ice cube mold 126. As the water freezes, the dielectric constant decreases to about 6 times that of air, reducing the imbalance of the bridge and decreasing the signal sent by ice-ready sensor 142 to controller 116. Alternatively, the bridge can be balanced such that the output is nearly zero when water is present in the mold, in which case the bridge becomes more unbalanced when the water freezes, and a large output indicates that the ice is ready.

[0047] If a second fullness sensor 146 disposed within or about second ice cube storage bin 114 generates a signal to controller 116 that the level of ice cubes 128 within second ice cube storage bin 114 has dropped below a preset fill level, a cycle is initiated and controller 116 energizes second motor 106 to rotate auger mechanism 109 disposed

within first ice cube storage bin 112. Auger mechanism 109 advances ice cubes 128 into an ice chute 148. Controller generates a signal to switch a diverter 149 to block ice chute from delivering ice cubes 128 to the dispenser and to allow passage of ice cubes 128 to second ice cube storage bin 114 and ice cubes 128 are delivered to second ice cube storage bin 114.

[0048] In one embodiment, fullness sensors 144, 146 are a weight determining means such as a microswitch. In another embodiment, fullness sensors 144, 146 are an ultrasonic level detector.

[0049] In a preferred embodiment, fullness sensors 144, 146 comprise an ultrasonic transmitter (piezo driver) 175, an ultrasonic receiver (piezo microphone) 177 and an electronic circuit capable of causing transmitter to emit a short burst 179 (approximately 100 microseconds long) of ultrasound and capable of measuring the time interval between short burst 179 and a return echo 181 received by receiver 177, as shown in FIG. 5. This time interval is proportional to the distance between fullness sensor 144, 146 and the top layer of ice cubes 128 and is therefore a measure of the fullness of ice cube storage bin 112, 114.

[0050] In another embodiment, fullness sensors 144, 146 comprise an optical proximity switch that detects the fullness of ice cube storage bin 112, 114. The optical switch sends out light (usually IR) and detects the reflected light intensity with a photodiode. High intensity of reflected light indicates close proximity of ice or fullness. Pulse width modulation of the IR signal can be used to increase the sensitivity of the optical switch.

[0051] The instant invention does not use solenoid valves and has no "feeler" to determine if ice cube storage bins 112, 114 (FIG. 2) are full, thereby avoiding the two most frequent causes of service calls. Additionally, since ice cubes 128 are not partially melted for mold release and stored in buckets that are protected from defrost air, fusing

of ice cubes 128 is less likely to occur.

[0052] In operation, if a system user presses push button 138, a signal is generated and controller 116 energizes second motor 106 and ice cubes 128 are delivered by auger mechanism 109 from first ice cube storage bin 112 to a conventional ice dispenser. As with most conventional delivery systems, a system user can select either crushed ice or whole cubes to be delivered (or water in most systems). If a user selects crushed ice, ice cubes 128 are fed from first ice cube storage bin 112 to crusher 108. Second motor 106 activates crusher 108 and sets of rotating and stationary blades break up the cubes as the blades pass each other, and the crushed ice is delivered to the system user. If a user selects whole ice cubes, crusher 108 is bypassed and whole ice cubes 128 are delivered to the system user.

[0053] An exemplary control logic sequence 200 (starting at block 201) for icemaker assembly 100 is shown in FIG. 6. This control logic sequence is inputted into controller 116 (FIG. 2), for example, by programming into memory of an application specific integrated circuit (ASIC) or other programmable memory device.

[0054] At block 202 (FIG. 6), controller 116 monitors signals generated from first fullness sensor 144. Controller 116 compares the signals generated from first fullness sensor 144 with a preset fullness value.

[0055] If the signals generated from first fullness sensor 144 are greater than or equal to the preset fullness value, the control sequence advances to block 204. If, however, the signals generated from first fullness sensor 144 are less than the preset value (indicating low ice), the control sequence advances to block 206.

[0061] If, however, the signals generated from second fullness sensor 146 are greater than or equal to the preset value, the control sequence advances to block 210 and second motor 106 remains off or if previously on, second motor 106 is turned off and the control sequence returns to block 201.

[0062] Ice cube molds 126 disposed within conveyor belt 124 must stretch by a large factor as molds 126 travel over each roller 120, 122. Accordingly, in one embodiment, each ice cube mold 126 within a single row 132 of flexible conveyor belt 124 is connected to the adjacent ice cube molds with deep, narrow weirs 220, as shown in FIGS. 7 and 8. Since weirs 220 can open up without excessively stretching the mold material, as flexible conveyor belt 124 travels over each roller 120, 122, (Fig. 2) deep, narrow weirs 220 substantially increase the compliance of flexible conveyor belt 124 and reduce the amount of stretching required. A side view of deep, narrow weirs 220 is shown in FIG. 8. For an ice cube 128 roughly one inch on each side, weir 220 is typically in the range between about 0.3 inches to about 0.75 inches deep by about 0.06 inches to about 0.25 inches wide. To prevent regions of concentrated stress, bottom 222 of weir 220 is preferably a semi-circle.

[0063] One embodiment of ice cube molds 126 with fanfold walls 230 is shown in FIG. 9 & 10. When ice cube molds 126 are made from highly elastic materials (such as silicone rubber) as molds 126 are deformed, after passing front roller 120, in order to release frozen ice cubes 128, molds 126 tend to bend inward on an opposite side in response to being bent outward on a pair of sides. This bending causes ice cubes 128 to be gripped instead of released.

[0067] In this embodiment, bases 306 of ice cube molds 126 are affixed to the conveyor belt 124 on rectangular regions that are rigid and planar in the regions where sides 304 of molds 126 contact belt 124, and that are somewhat flexible in the region of center 301 of mold 126. The regions of belt 124 between these rectangular regions are flexible. The molds are not connected to belt 124 at any other place except bases 306. Thus, when rows 302 of molds 126 pass around front roller 120, a generally wedged shape region opens up between adjacent rows due to the fact that the tops of the molds are at a larger radius with respect to the roller shaft than the bases. Due to the rigidity and the planarity of the regions where sides 304 of the bases are attached to belt 124 and the flexibility of belt 124 between these regions, base regions 306 in adjacent rows will naturally want to follow a polygonal shape rather than a circle, and in a preferred embodiment, such a shape is formed into the roller in the regions where the bases are rigid and the belt tension is adjusted to assure a tight fit between the polygon shape of the belt and that in the roller.

[0068] In this same embodiment, the region of the roller that contacts the central region of the molds is left in its original cylindrical form. In this embodiment, there are circumferential ridges 300 disposed on roller 120 in the regions beneath centers 301 of molds 126. In both embodiments, the roller regions beneath centers 301 of molds 126 have a larger radius than the radius at which mold 301 centers would travel in an unstrained condition, and they must deform in order to travel around the roller. This deformation will break the bond between ice cubes 128 and mold 126 and eject the ice cubes 128.

[0069] It should be noted that in order to fracture the bond between the ice cube and its mold, shear must be propagated all the way up the sides of the mold. This will happen if the sides of the mold are sufficiently rigid, but if they are too flexible the deformation induced at the base may not propagate all the way to the top. In this case a stiffener can be incorporated either within the sides of the molds or along an outside surface. In one embodiment (not shown) external stiffeners are used which also serve to stiffen the edges of the bases of the molds (as discussed above).

[0070] A side view diagram of another roller shape is shown in Figure 12. Here a preferred triangular roller shape 400 is shown. Note that each side of triangle 400 is shown with a bump 402 in the middle of it. This is actually a row of bumps whose positions correspond to the centers of ice cube molds 126 in the row. Ice cube molds 126 molds have at least a flexible portion 404 corresponding to the places where bumps 402 contact them so that bumps 402 can protrude into molds 126 and eject ice cubes 128 therefrom. As a row of molds 126 advances to the front, bumps 402 first contact molds 126 during the cycle that advances the row to a position where the bases are vertical

[0071] Figure 12 is shown with a circular roller on the right (rear roller). The advantage of a circular roller is that the diameter can be varied continuously to exactly achieve a desired rate of motion of the belt. Regular polygons of any desired number of sides could also have been used, and each of these would provide a specific rate of motion.

[0072] Belt can be made of more than one material. For example, an inelastic material can be used as a bottom web 500, which is bonded to elastic material that forms a lateral web 502 and a longitudinal vertical 504 web that form the sides of the ice cubes, as shown in FIG. 13. An advantage of a composite construction such as this is that inelastic bottom web 500 may be stronger with regards to roller-belt friction and may provide longer life for belt 124.

[0073] While the invention has been described with reference to preferred embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiments disclosed herein, but that the invention will include all embodiments falling within the scope of the appended claims.

Claims

- [c1] 1. An icemaker assembly disposed within a freezer assembly, said icemaker assembly comprising a conveyor assembly positioned within a freezer compartment of said freezer assembly, having at least a front roller and a rear roller and a continuous flexible conveyor belt fitted in tension about said front and rear rollers, said conveyor belt having a multiplicity of individual ice cube molds for creation of individual cubes therein; and at least one ice cube storage bin positioned below said conveyor assembly for storage of said ice cubes.
- [c2] 2. An icemaker assembly in accordance with claim 1 wherein said freezer assembly is a refrigerator having a freezer compartment and a fresh food compartment.
- [c3] 3. An icemaker assembly in accordance with claim 1 wherein said refrigerator is a side-by-side refrigerator.
- [c4] 4. An icemaker assembly in accordance with claim 1, wherein said continuous flexible conveyor belt is made from the group consisting of thermoplastic elastomer, butyl rubber, chlorobutyl rubber, natural rubber, synthetic rubber, neoprene rubber, polyurethane, ethylene-propylene-diene modified, ethylene-propylene rubber, and silicone rubber.

- [c5] 5. An icemaker assembly in accordance with claim 1, wherein said continuous flexible conveyor belt has a length in the range between about 12 in. to about 18 in.
- [c6] 6. An icemaker assembly in accordance with claim 1, wherein said continuous flexible conveyor belt has a width in the range between about 3 in. to about 8 in.
- [c7] 7. An icemaker assembly in accordance with claim 1, wherein said continuous flexible conveyor belt has between about 20 individual ice cube molds to about 300 individual ice cube molds.
- [c8] 8. An icemaker assembly in accordance with claim 1, wherein said continuous flexible conveyor belt has between about 10 individual rows of ice cube molds and about 30 individual rows of ice cube molds.
- [c9] 9. An icemaker assembly in accordance with claim 1, wherein said ice cube molds are made of a rigid material and are attached to said flexible conveyor belt.
- [c10] 10. An icemaker assembly in accordance with claim 1, wherein said rigid material is selected from the group consisting of polypropylene, polyethylene, nylon, and ABS.
- [c11] 11. An icemaker assembly in accordance with claim 1 wherein said continuous flexible conveyor belt has between about 2 individual columns of ice cube molds and about 10 individual columns of ice cube molds.
- [c12] 12. An icemaker assembly in accordance with claim 1 further comprising a first motor drivingly coupled to at least one of said front or rear rollers, wherein said first motor is selectively energizable to drive said rollers and rotate said belt.

assembly, wherein said first ice cube storage bin is alignable with said conveyor assembly to receive ice cubes therefrom; a first motor drivingly coupled to said conveyor assembly for advancing said conveyor belt; a controller electronically coupled to said first motor; and a second ice cube storage bin removably disposed within a lower portion of said freezer door assembly, wherein said second ice cube storage bin variably communicates with said first ice cube storage bin to receive ice cubes therefrom.

- [c29] 29. An icemaker assembly according to claim 28 further comprising a refill valve electronically coupled to said controller to fill respective molds with water.
- [c30] 30. An icemaker assembly according to claim 28 further comprising a second motor, positioned within a freezer door, which second motor is drivingly coupled to an ice crusher, which ice crusher selectively crushes ice cubes or delivers whole ice cubes.
- [c31] 31. An icemaker assembly according to claim 28 wherein said controller generates a signal to energize said first motor when a fullness sensor is activated in relation to said first ice cube storage bin.
- [c32] 32. An icemaker assembly according to claim 28 wherein said flexible conveyer belt is made of a flexible polymer.
- [c33] 33. An icemaker assembly according to claim 32 wherein said flexible polymer is selected from the group consisting of thermoplastic elastomer, butyl rubber, chlorobutyl rubber, natural rubber, synthetic rubber, neoprene rubber, polyurethane, ethylene-propylene-diene modified, ethylene-propylene rubber, and silicone rubber.
- [c34] 34. An icemaker assembly according to claim 28 wherein said ice cube molds are molded directly into the material of said flexible conveyer belt.

- [c53] 53. An icemaker assembly according to claim 52 wherein an IR light emitting diode positioned adjacent said band emits light that reaches a photodiode positioned below said band only when a hole passes therebetween.
- [c54] 54. An icemaker assembly according to claim 53 wherein said controller determines whether said hole is present by processing a signal from said photodiode and if said hole is between said light emitting diode and said photodiode said controller stops said first motor and commences a water dose.
- [c55] 55. An icemaker assembly according to claim 29 wherein said refill valve is a doser mechanism consisting of a rotary multiport valve and a doser housing.
- [c56] 56. An icemaker assembly according to claim 55 wherein said doser housing consists of an enclosed volume of about 10-50 ml divided into a first section and a second section by a flexible diaphragm.
- [c57] 57. An icemaker assembly according to claim 56 wherein tubing connects said rotary valve and an icemaker fill tube, a water dispenser tube and a water supply.
- [c58] 58. An icemaker assembly according to claim 57 wherein said valve simultaneously connects said water supply to said first section of said doser housing and said ice maker fill tube to said second section of said doser housing during a refill and the pressure of said water supply pushes said flexible diaphragm displacing the water in said second section of said doser housing to said fill tube and after an appropriate amount of time for said diaphragm to fully transverse said second section said rotary valve is moved to connect said water supply to said second section of said doser housing and simultaneously connect said first section of said doser housing with said icemaker fill tube wherein said water supply pressure forces said diaphragm back across said doser housing displacing the water in said first section

of said doser housing to said fill tube.

- [c59] 59. An icemaker assembly according to claim 28 wherein said second ice cube storage bin is disposed in a lower portion of said freezer door below said first ice cube storage bin.
- [c60] 60. An icemaker assembly according to claim 28 further comprising a detection sensor is coupled to said second ice cube storage bin to prevent said ice maker assembly from sending ice cubes to said second ice cube storage bin when second ice cube storage bin is not in place.
- [c61] 61. An icemaker assembly according to claim 60 wherein said detection sensor is a microswitch that is actuated by a special geometrical feature of said second ice cube storage bin.
- [c62] 62. An icemaker assembly according to claim 61 wherein said special geometrical feature of said second ice cube storage is a pin or a tab.
- [c63] 63. An icemaker assembly according to claim 60 wherein said detection sensor is an inductive proximity sensor that detects a metal insert on said second ice cube storage bin.
- [c64] 64. An icemaker assembly according to claim 60 wherein said detection sensor is an optical sensor that detects a reflecting surface adhered to said second ice cube storage bin.
- [c65] 65. An icemaker assembly according to claim 28 further comprising, a first fullness sensor disposed within or about said first ice cube storage bin that generates a signal to said controller that the level of ice cubes within second ice cube storage bin has dropped below a preset fill level initiating a cycle and said controller energizes said first motor.

- [c73] 73. An icemaker assembly according to claim 72 wherein an excitation frequency is applied to said capacitance bridge and said bridge is balanced such that when a respective ice cube mold is empty the voltage across said bridge is nearly zero and when water is in a respective ice cube mold the capacitance reading of said ice-ready sensor increases dramatically, because the dielectric constant of water is about 80 times that of air, causing the bridge to become unbalanced. and as water freezes, the dielectric constant decreases to about 6 times that of air, reducing the imbalance of the bridge and decreasing the signal sent by said ice-ready sensor to said controller.
- [c74] 74. An icemaker assembly according to claim 65 wherein said fullness sensor is a weight determining means.
- [c75] 75. An icemaker assembly according to claim 74 wherein said weight determining means is a microswitch.
- [c76] 76. An icemaker assembly according to claim 65 wherein said fullness sensor is an ultrasonic level detector.
- [c77] 77. An icemaker assembly according to claim 76 wherein said ultrasonic level detector comprises an ultrasonic transmitter, an ultrasonic receiver and an electronic circuit capable of causing said transmitter to emit a short burst of ultrasound and capable of measuring the time interval between said short burst and a return echo received by receiver wherein this time interval is proportional to the distance between said fullness sensor and a top layer of ice cubes.

- [c78] 78. An icemaker assembly according to claim 65 wherein said fullness sensor comprises an optical proximity switch that detects the fullness of said second ice cube storage bin when said optical switch sends out light and detects a reflected light intensity with a photodiode such that high intensity of reflected light indicates close proximity of ice or fullness.
- [c79] 79. An icemaker assembly according to claim 48 further comprising a second fullness sensor disposed within or about said second ice cube storage bin that generates a signal to said controller that the level of ice cubes within second ice cube storage bin has dropped below a preset fill level initiating a cycle and said controller energizes said second motor to rotate auger mechanism disposed within said first ice cube storage bin.
- [c80] 80. An icemaker assembly according to claim 79 wherein said controller generates a signal to switch a diverter to block ice chute from delivering ice cubes to a dispenser and to allow passage of ice cubes to said second ice cube storage bin.
- [c81] 81. An icemaker assembly according to claim 79 wherein said fullness sensor is a weight determining means.
- [c82] 82. An icemaker assembly according to claim 81 wherein said weight determining means is a microswitch.
- [c83] 83. An icemaker assembly according to claim 79 wherein said fullness sensor is an ultrasonic level detector.
- [c84] 84. An icemaker assembly according to claim 83 wherein said ultrasonic level detector comprises an ultrasonic transmitter, an ultrasonic receiver and an electronic circuit capable of causing said transmitter to emit a short burst of ultrasound and capable of measuring the time interval between said short burst and

a return echo received by receiver wherein this time interval is proportional to the distance between said fullness sensor and a top layer of ice cubes.

[c85] 85. An icemaker assembly according to claim 83 wherein said fullness sensor comprises an optical proximity switch that detects the fullness of said second ice cube storage bin when said optical switch sends out light and detects a reflected light intensity with a photodiode such that high intensity of reflected light indicates close proximity of ice or fullness.

[c86] 86. An icemaker assembly comprising: a conveyor assembly; a first motor drivingly coupled to said conveyor assembly; a second motor drivingly coupled to an ice crusher and an auger mechanism; a refill valve positioned adjacent to conveyor assembly; a first ice cube storage bin, a removable second ice cube storage bin, and a controller electrically coupled to said first motor and said second motor.

[c87] 87. An icemaker assembly according to claim 86 wherein said conveyor assembly comprises at least a front roller and a rear roller and a continuous flexible conveyor belt fitted in tension about said front and rear rollers, said conveyor belt having a multiplicity of individual ice cube molds for creation of individual cubes therein.

[c88] 88. An icemaker assembly according to claim 86, further comprising a belt position sensor that generates a signal to said controller indicating that said conveyor belt is in a correct refill position.

[c89] 89. An icemaker assembly according to claim 86, further comprising a first fullness sensor disposed within or about first ice cube storage bin that generates a signal to controller when the level of ice cubes within first ice cube storage bin falls below a preset level.

- [c90] 90. An icemaker assembly according to claim 86, further comprising a second fullness sensor disposed within or about second ice cube storage bin that generates a signal to controller when the level of ice cubes within second ice cube storage bin falls below a preset level.
- [c91] 91. An icemaker assembly according to claim 86, further comprising an ice ready sensor that generates a signal to controller that a respective row of ice cubes is frozen.
- [c92] 92. An icemaker assembly comprising: a means for conveying ice; a first motor means drivingly coupled to said means for conveying; a second motor means drivingly coupled to an ice crushing means and an auger means; a means for refilling is positioned adjacent to said means for conveying; a first means for storing ice, a removable second means for storing ice, and a means for controlling coupled to said first motor means and said second motor means.

Figures

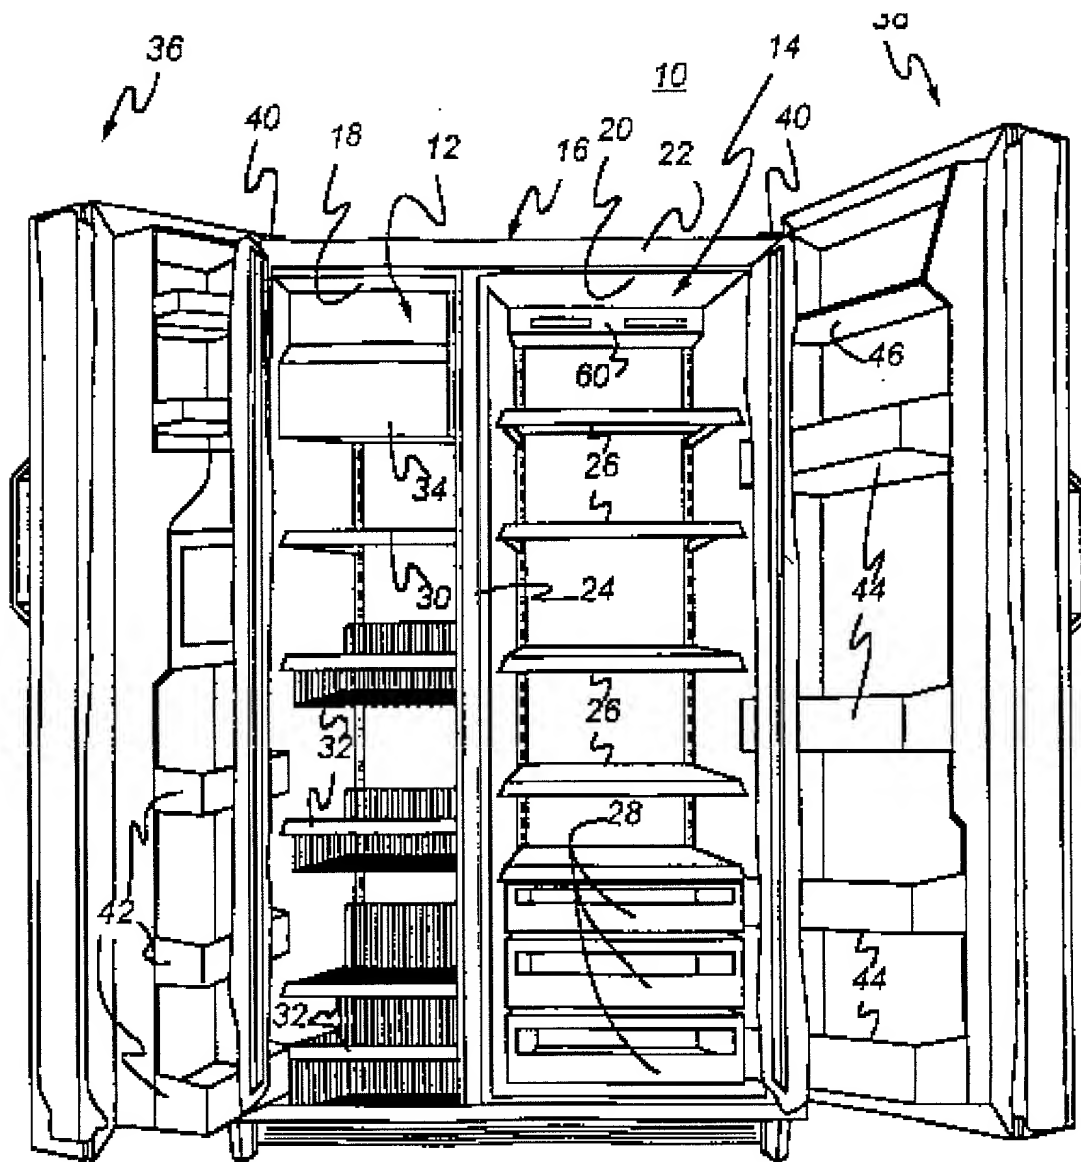


fig. 1
PRIOR ART

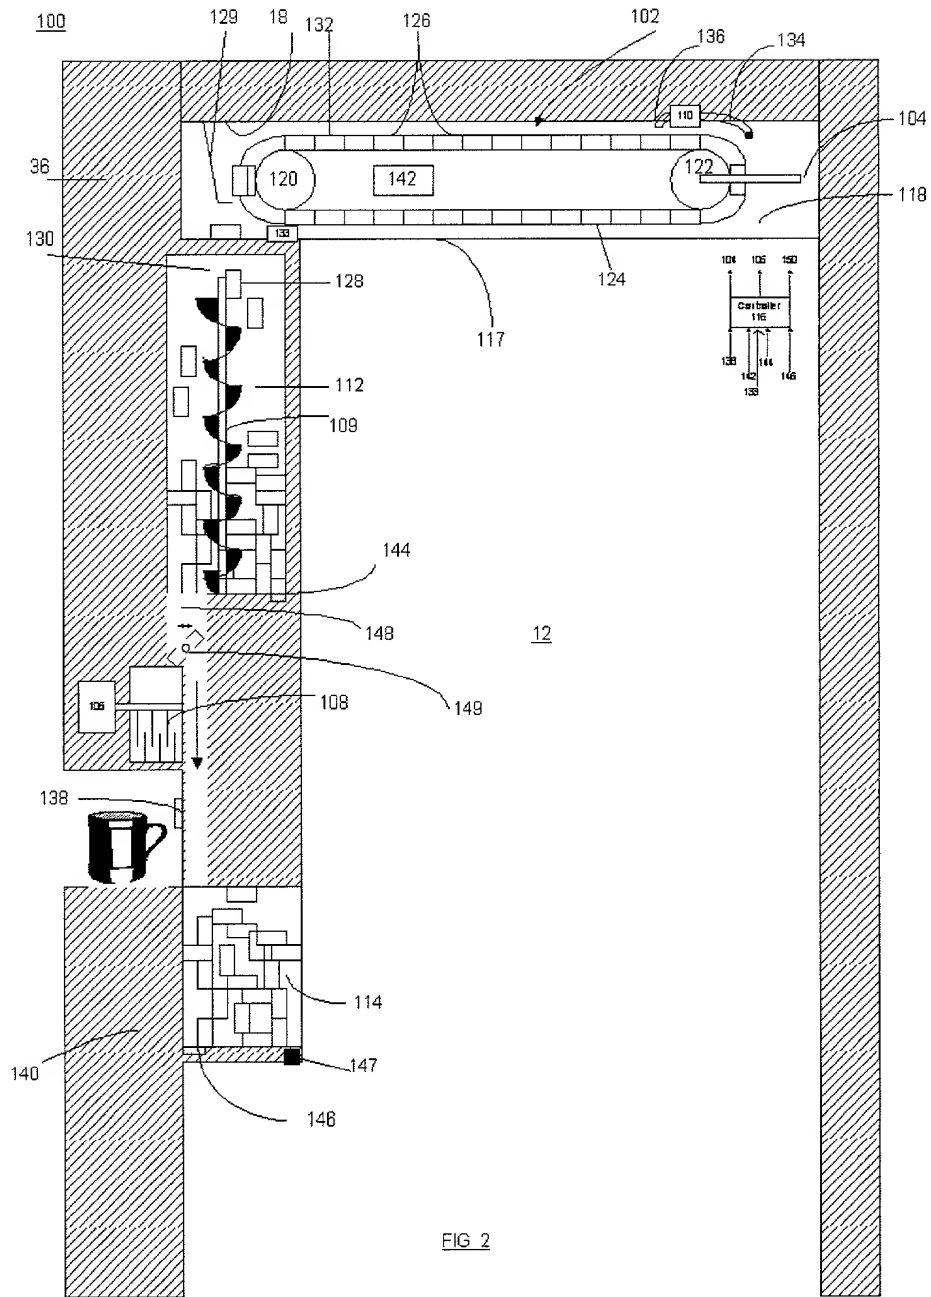


FIG 2

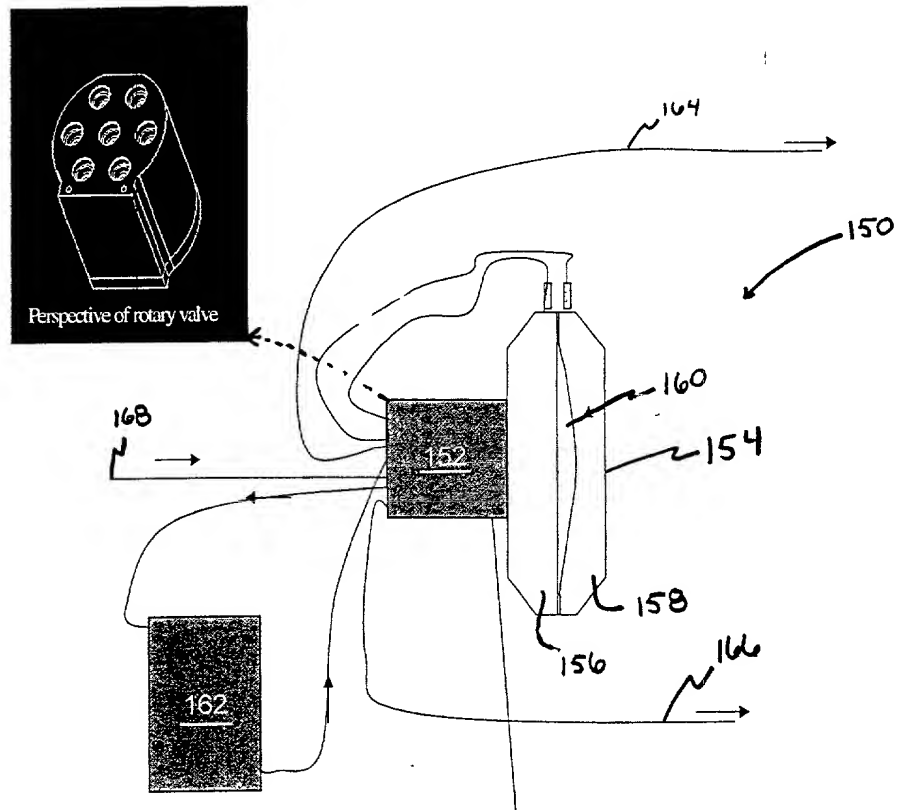


FIG 4

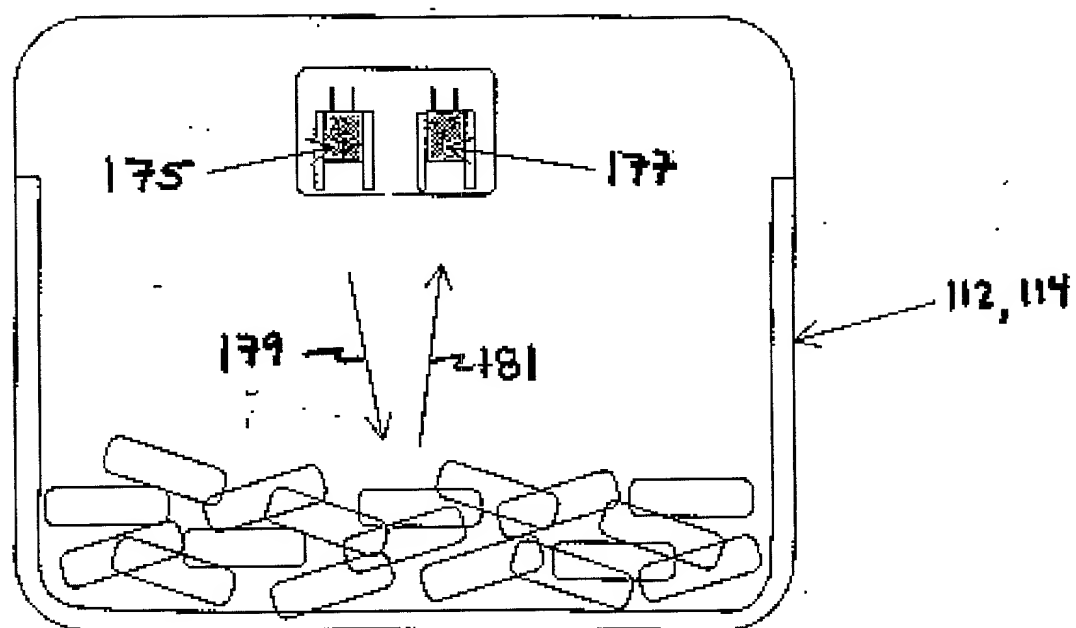
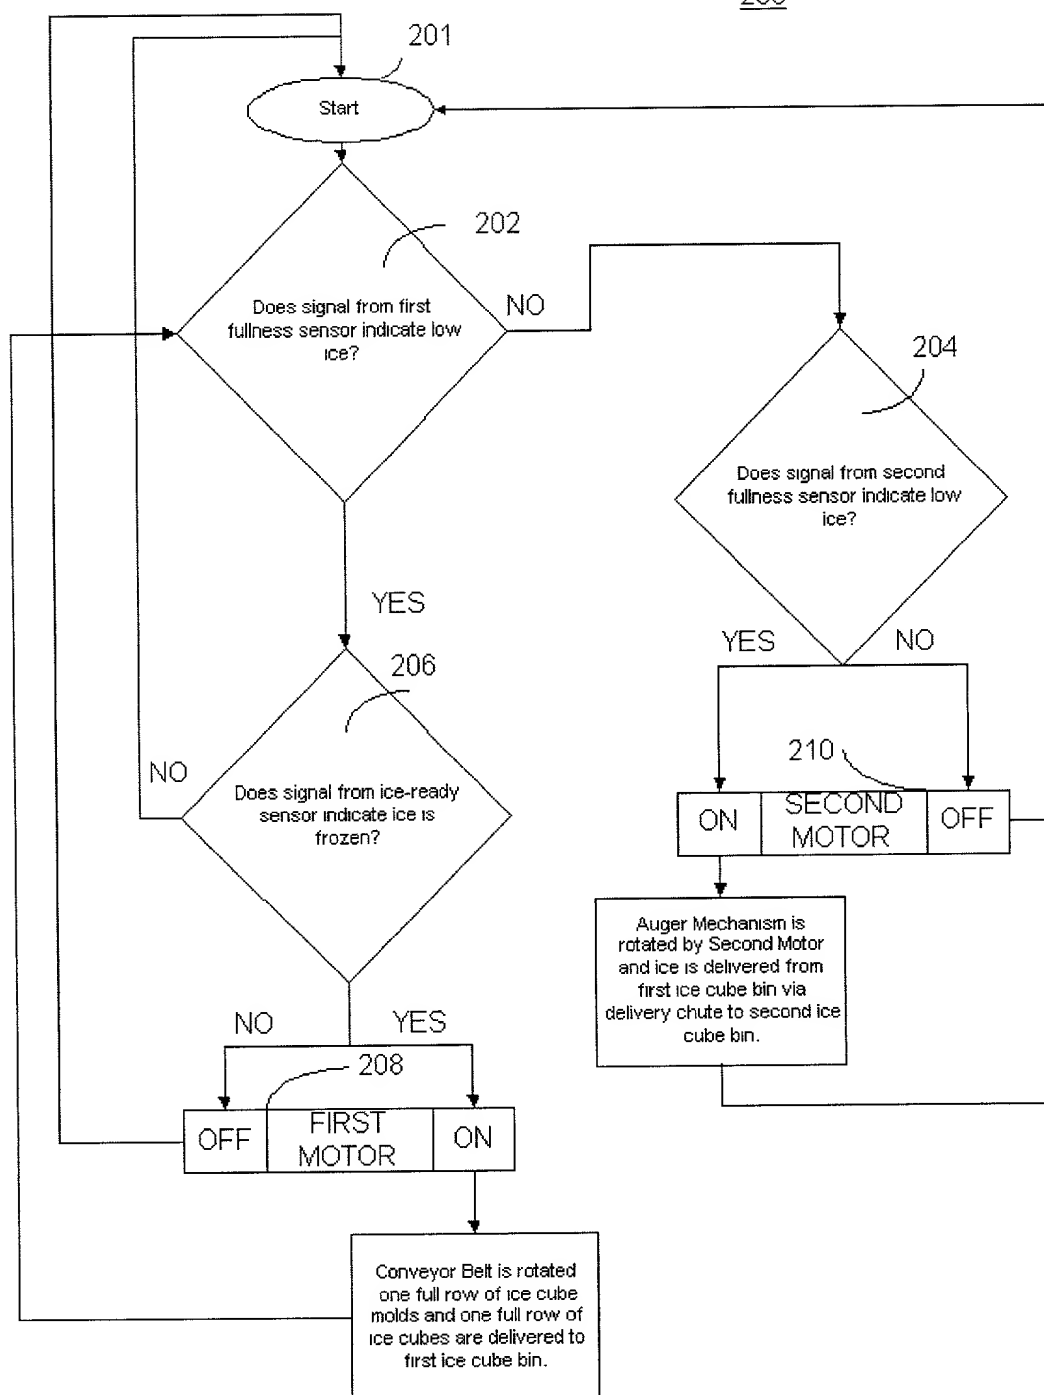


Fig 5



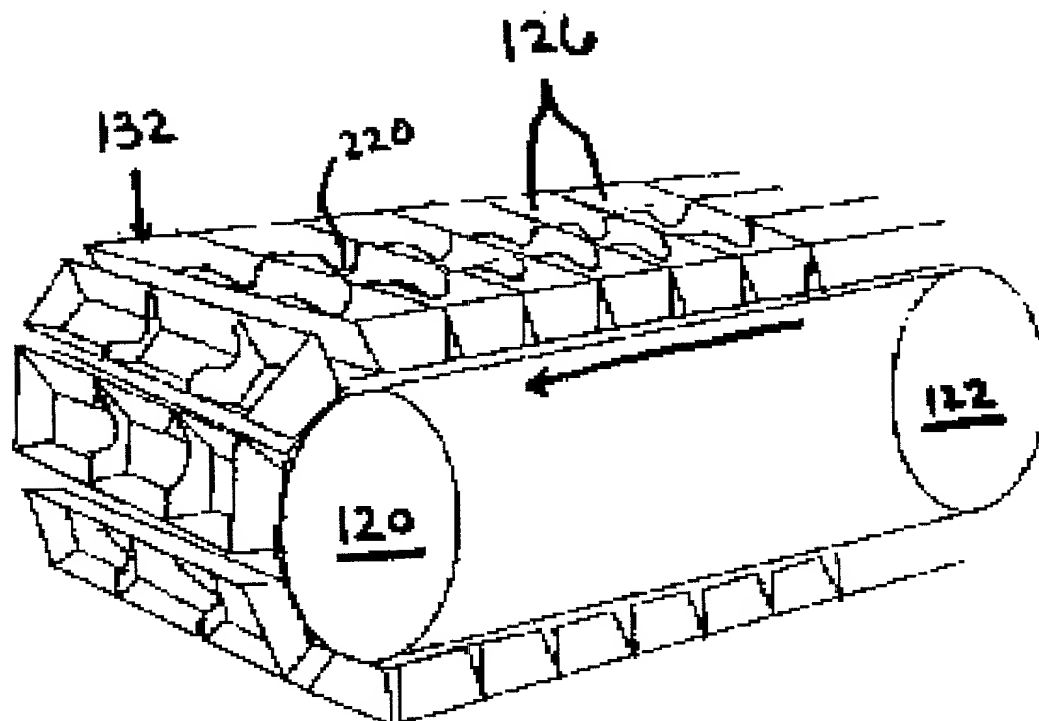


FIG. 7

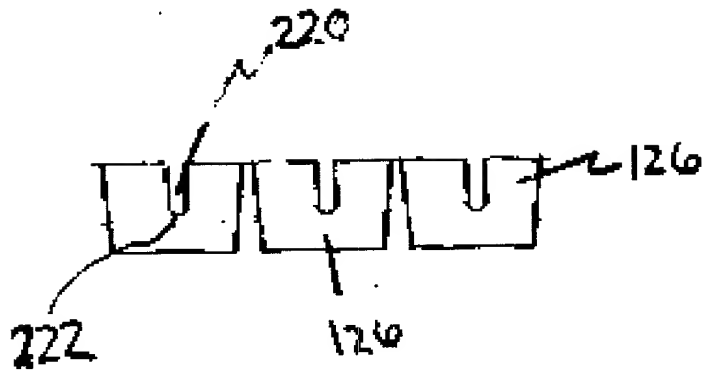


FIG. 8

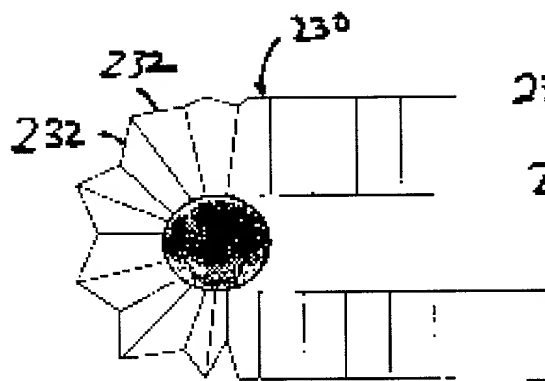


FIG. 9

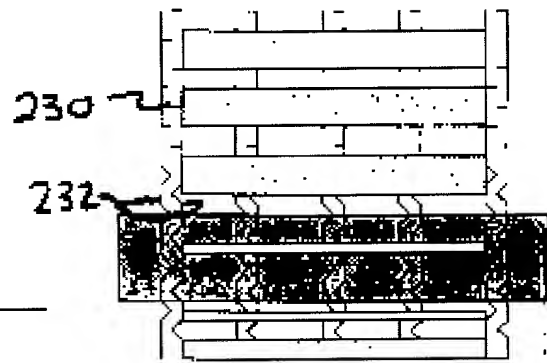


FIG. 10


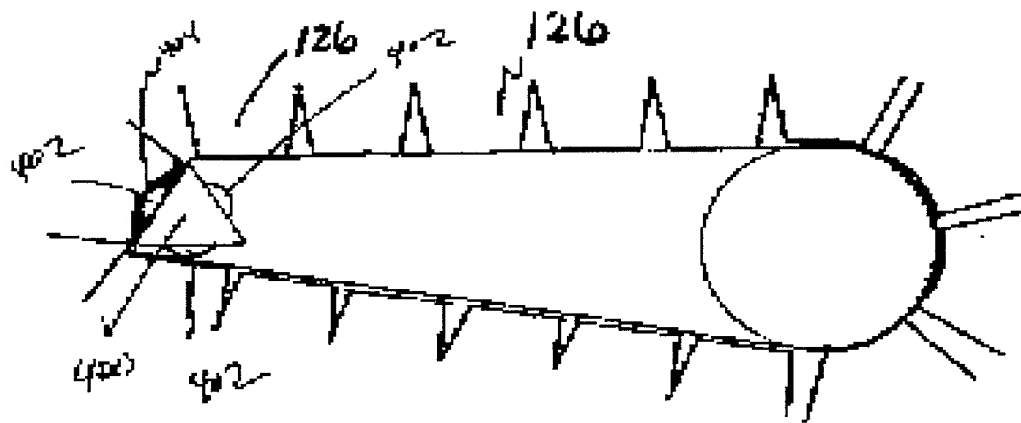


FIG. 12

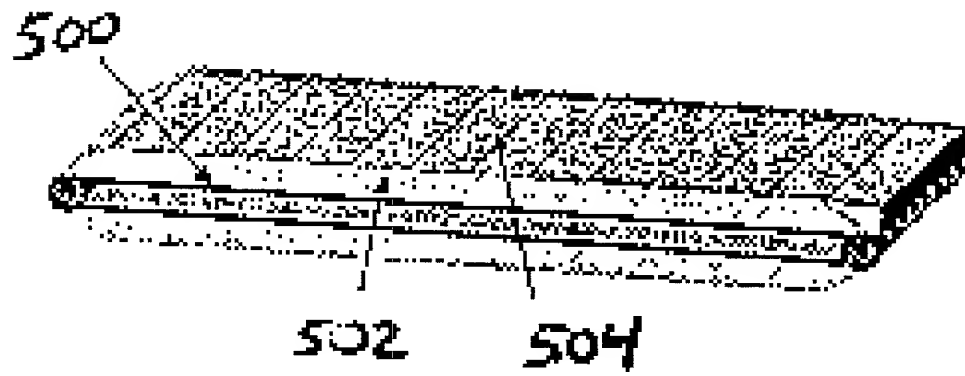

DECLARATION FOR PATENT APPLICATION

Docket Number
RD-26643/USA

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Isomaker Assembly

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as United States Application Number or PCT International Application Number _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application

Priority Claimed

☐ Yes ☐ No☐ Yes ☐ No

Thereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

60/158,636

10/08/99

60/158,630

10/08/99

(Application Number)

(Filing Date)

60/158,631

10/08/99

(Application Number)

(Filing Date)

60/158,634

10/08/99

60/158,633

10/08/99

Thereby claim the benefit under Title 35, United States Code §120 of any United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, CUSTOMER NO. 006147.

Patrick K. Patnode, Reg. No. 40,121

Douglas E. Stoner, Reg. No. 26,509, Marvin Snyder, Reg. No. 20,126, Donald S. Ingraham, Reg. No. 33,714, Jill M. Breedlove, Reg. No. 32,684, Noreen C. Johnson, Reg. No. 38,929, Ronald E. Myrick, Reg. No. 26,315, Henry J. Policinski, Reg. No. 26,821 and Jay L. Chaskin, Reg. No. 24,030.

Address all telephone calls to: Patrick K. Patnode at telephone number (518) 387-5286

Address all correspondence to: General Electric Company
CRD Patent Docket Rm 4A59
P.O. Box 6, Bldg. K-1 - Salamone
Schenectady, New York 12301

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SOLE OR FIRST INVENTOR:

Full name: Andrew Philip Shapiro

First Name

Middle Name

Last Name

Signature: _____ Date: _____

Residence: Niskayuna, New York

City and State

Citizenship: USPost Office Address: 1086 Morningside Ave., Niskayuna, New York 12309

SECOND JOINT INVENTOR:

Full name: Jerome Johnson Tiemann

First Name

Middle Name

Last Name

Signature: _____ Date: _____

Residence: Schenectady, New York

City and State

Citizenship: USPost Office Address: 234 Union Street, Schenectady, New York 12305

THIRD JOINT INVENTOR:

Full name: Walter (nmn) Whipple

First Name

Middle Name

Last Name

Signature: _____ Date: _____

Residence: Amsterdam, New York

City and State

Citizenship: USPost Office Address: 185 Church St., Amsterdam, New York

FOURTH JOINT INVENTOR:

Full name: Timothy Scott Shaffer

First Name

Middle Name

Last Name

Signature: _____ Date: _____

Residence: LaGrange, KY

City and State

Citizenship: USPost Office Address: 1904 Grand Villa Drive, LaGrange, KY 40031

FIFTH JOINT INVENTOR:

Full name: William Merritt Nall, Jr.

First Name

Middle Name

Last Name

Signature: _____

Date _____

Residence: Louisville, Ky

City and State

Citizenship: US

Post Office Address: 8900 Lantern Lite Parkway, Louisville, KY 40220

SIXTH JOINT INVENTOR:

Full name: Eayre Bruce Voorhees

First Name

Middle Name

Last Name

Signature: _____

Date _____

Residence: Sloansville, New York

City and State

Citizenship: US

Post Office Address: RD #1, Box 56, Sloansville, New York 12160

SEVENTH JOINT INVENTOR:

Full name: _____

First Name

Middle Name

Last Name

Signature: _____

Date _____

Residence: _____

City and State

Citizenship: _____

Post Office Address: _____

EIGHTH JOINT INVENTOR:

Full name: _____

First Name

Middle Name

Last Name

Signature: _____

Date _____

Residence: _____

City and State

Citizenship: _____

Post Office Address: _____